





Kent Automation
 449 Dodge St.
 Kent • Ohio • 44240
 Ph: +1- 330-678-6343
 Fax: +1- 330-678-4770
www.KentAutomation.com
Sales@mmmind.com



NOTCHING SAW

SILL AND JAMB FABRICATION IN SAME SAW

**AUTOMATED NOTCHING SAW EQUIPPED WITH TWO
 ADJUSTABLE SAW ASSEMBLIES DESIGNED TO
 NOTCH THE ENDS OF PRECUT PROFILES**

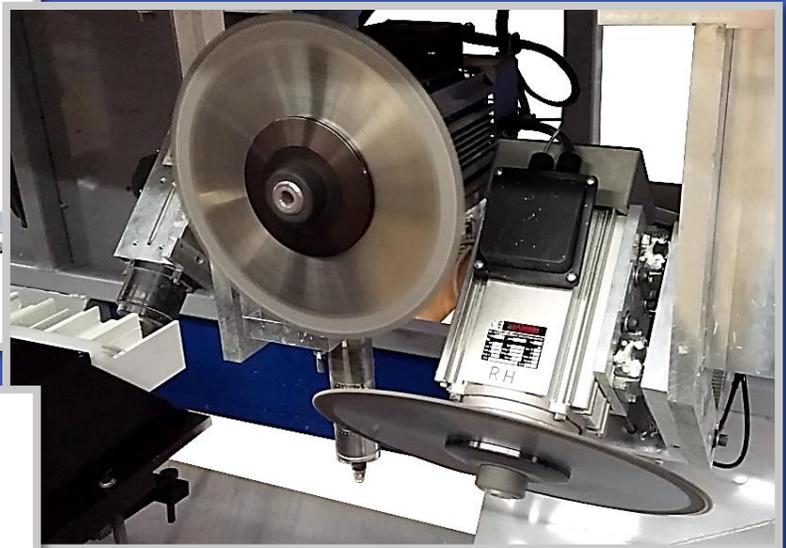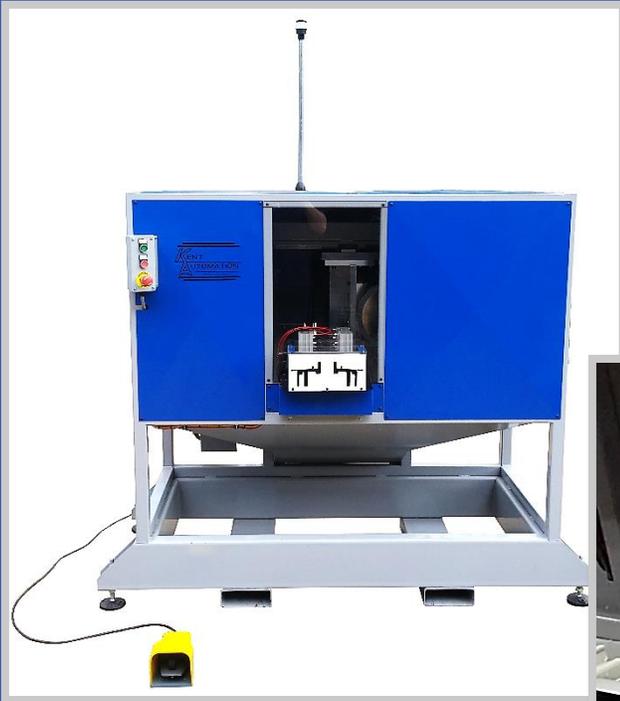

Features

- » All Sawing Configurations Driven Via Screw-Feed
- » Single Nest or Double Nest as Needed-Both Sill and Jamb can be Fabricated in the same Notch Saw
- » Hard Coat Anodized Fixture Nests
- » Stand Cross Cut for Sloped Sill Windows
- » Pneumatically Shifting Saw Blades Optional
- » Screw-Feed Allows for Multiple Stopping Points Across the Venue Offering the Ability for Additional Fabrication Points

Specifications

- » ½" Filter/Regulator with OSHA Compliant Lockout/Tagout
- » One 45° Saw Equipped with a 4 Horse Power (3450 RPM) Motor with Mechanical Brake and FineAngle Adjustment ± 5°
- » One 90° Saw Equipped with a 4 Horse Power (3450 RPM) Motor with Mechanical Brake
- » THK Linear Bearings and Rails
- » Allen Bradley Electrical Cabinet and components
- » Heavy Duty Welded Steel Frame
- » Scrap Exits Chute at Rear of Machine

CHECK US OUT



WWW.KENTAUTOMATION.COM